

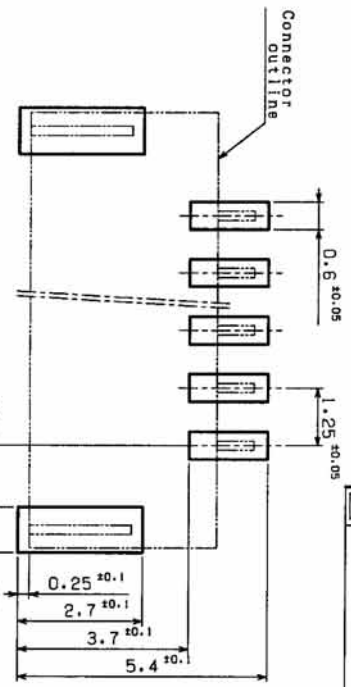
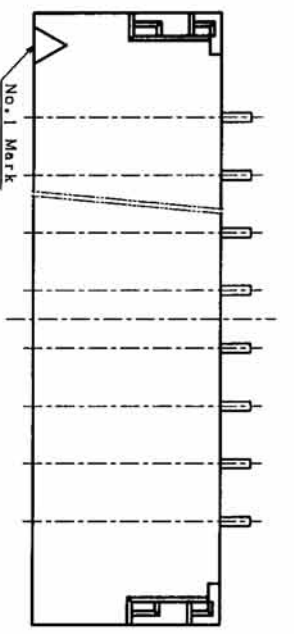



REV	DESCRIPTION	DATE	DESIGNED

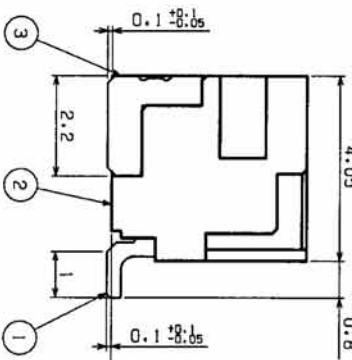

Cut-offs	Dimensions		
	A	B	C
2	1.25	3.75	5.75
3	2.50	5.00	7.00
4	3.75	6.25	8.25
5	5.00	7.50	9.50
6	6.25	8.75	10.75
7	7.50	10.00	12.00
8	8.75	11.25	13.25
9	10.00	12.50	14.50
10	11.25	13.75	15.75
11	12.50	15.00	17.00
12	13.75	16.25	18.25
13	15.00	17.50	19.50
14	16.25	18.75	20.75
15	17.50	20.00	22.00

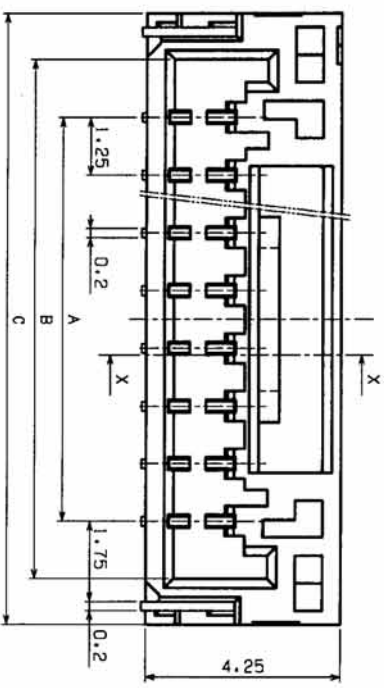

NOTE  
 1. Unless otherwise specified, tolerances are 0.05LSI, 0.1±0.15  
 1.0<LSI, 0.1±0.2  
 3.0<L : ±0.3  
 2. Coplanarity of contact solder tails is 0.1 mm max.  
 3. Tolerance of pattern pitch on PCB are not cumulative.

3	REINFORCEMENTS	BRASS	COPPER-UNDERPLATED TIN-PLATED	±0.2	
2	WAFER	9T NYLON			
1	HEADER PIN	PHOSPHOR BRONZE	COPPER-UNDERPLATED TIN-PLATED	±0.2	
			SURFACE FINISH		REMARKS
			CUSTOMER		
			SERIES NAME		
			PART No.		
			SM ( ) B-GHS (LP) (SN)		
			DRIVING No.		
			KRD-32979-3		
			RD		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

EC4109-2

