



REV	DESCRIPTION	DATE	DESIGNED
△			

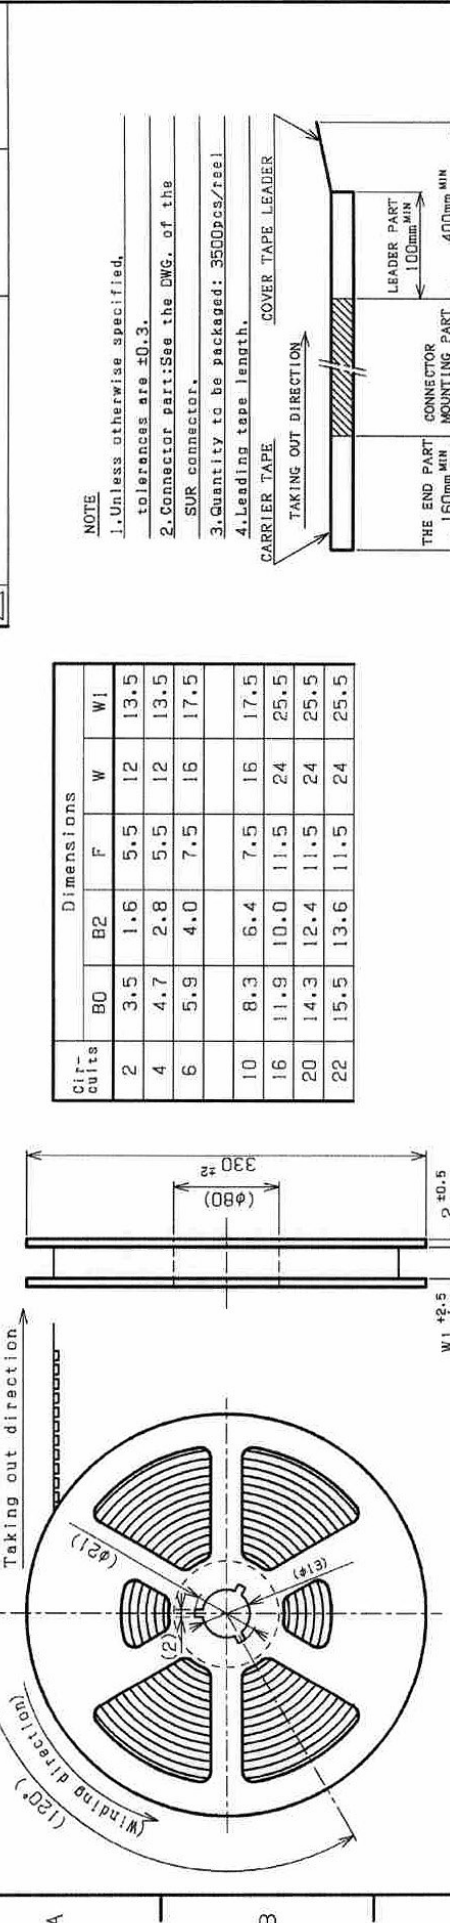


Circuits	Dimensions			
	B0	B2	F	W1
2	3.5	1.6	5.5	12
4	4.7	2.8	5.5	12
6	5.9	4.0	7.5	16
10	8.3	6.4	7.5	16
16	11.9	10.0	11.5	24
20	14.3	12.4	11.5	24
22	15.5	13.6	11.5	24




NOTE
 1. Unless otherwise specified, tolerances are ±0.3.
 2. Connector part: See the DWG. of the SUR connector.
 3. Quantity to be packaged: 9500pcs/roll
 4. Leading tape length.

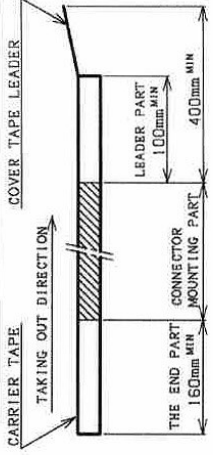

5. Cover tape peel strength: 0.1~1N (Peel speed: 30mm/minute)

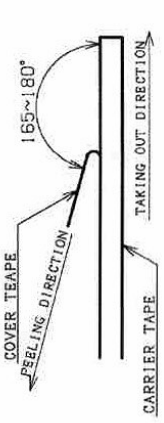

6. Material: Carrier tape: Polyester (PET)
 Cover tape: Polyester (PET)
 Reel: Flange: Polystyrene (PS)
 Core: Polypropylene (PP)
 Polystyrene (PS)

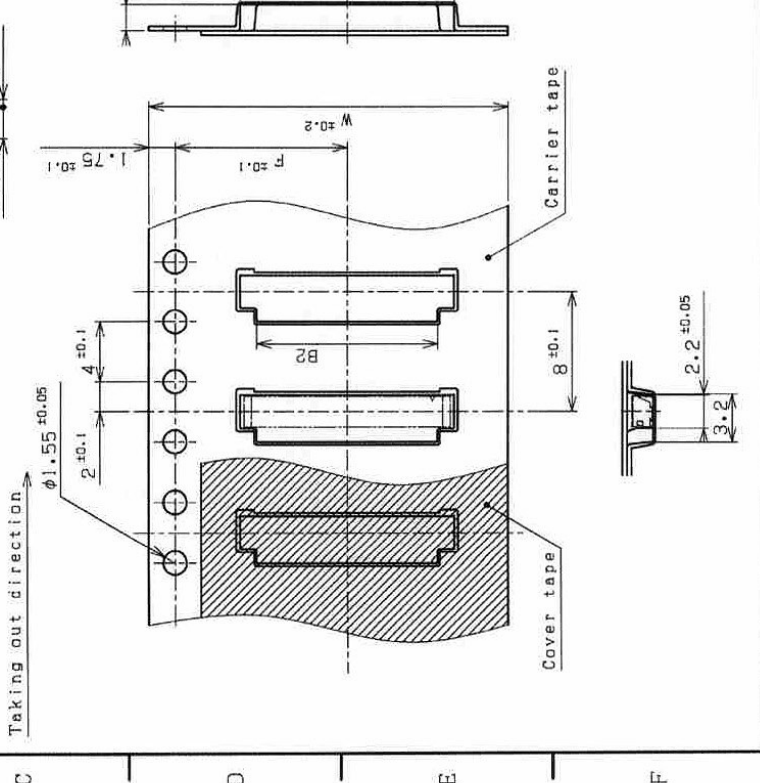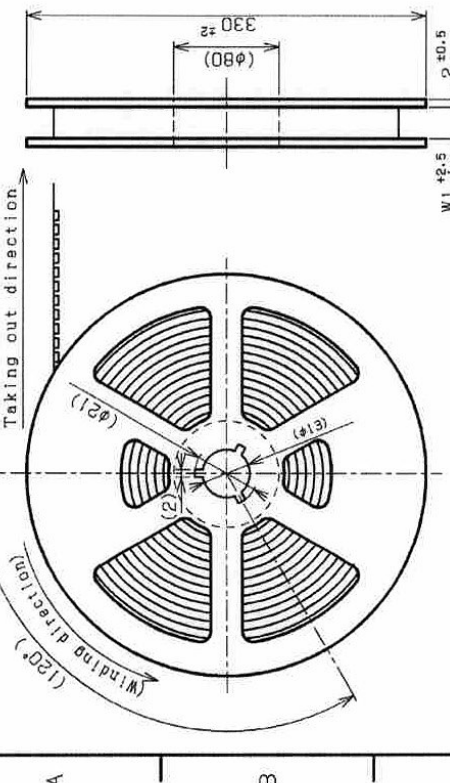

No.	PART NAME	MATERIAL	SURFACE FINISH	REMARKS
SIZE	UNIT	SCALE	PROJECTION	DATE
A3	METRIC	3:1	④	MAR. 5. 2007
APPROVED	CHECKED	DESIGNED	DRAWN	
S.S	T.T	M.H		
SERIES NAME				XSR CONNECTOR
PART No.				SM () B-XGRS-ETB (LF) (SN)
DRAWING No.				KRD-41040
CUSTOMER				RD

JST J. S. T. MFG. CO., LTD.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J. S. T. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION. EC4109-2