




SIN CONNECTOR

Single-circuit/Board-in Crimp type connectors

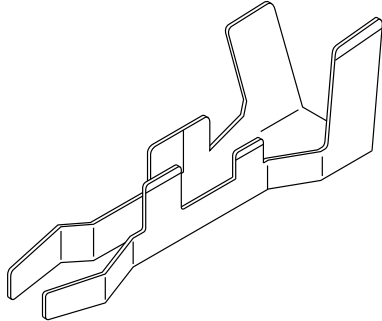

It is time consuming to directly solder the many wires that are required on densely packed printed circuit boards.

The SIN connector is crimped to a wire, inserted into a hole in a printed circuit board, then soldered. Solderability is enhanced because solder does not enter the wire, thus ensuring a safe and secure connection.

This connector is ideal for permanent connection of jumper wires onto a printed circuit board or for connection to external circuits.

Specifications


- Current rating: Depends on applicable wires
- Temperature range: -25°C to +85°C
(including temperature rise in applying electrical current)
- Applicable wire: AWG #30 to #10
- * In using the products, refer to "Handling Precautions for Terminals and Connectors" described on our website (Technical documents of Product information page).
- * RoHS2 compliance
- * Dimensional unit: mm
- * Contact JST for details.

Standards


- Ⓜ Recognized E60389
- Ⓢ Certified LR20812

Assembly layout


SIN-001T-1.2B




SIN-21T-1.8




SIN-002T-1.0
SIN-002T-1.2N




SIN-001T-1.2
SIN-01T-1.2



SIN-01T-1.8
SIN-01T-1.8N




SIN-002T-1.0S SIN-41T-2.4S
SIN-21T-1.8S SIN-61T-2.6S
SIN-81T-3.6S SIN-91T-4.7S



SIN CONNECTOR

Contact

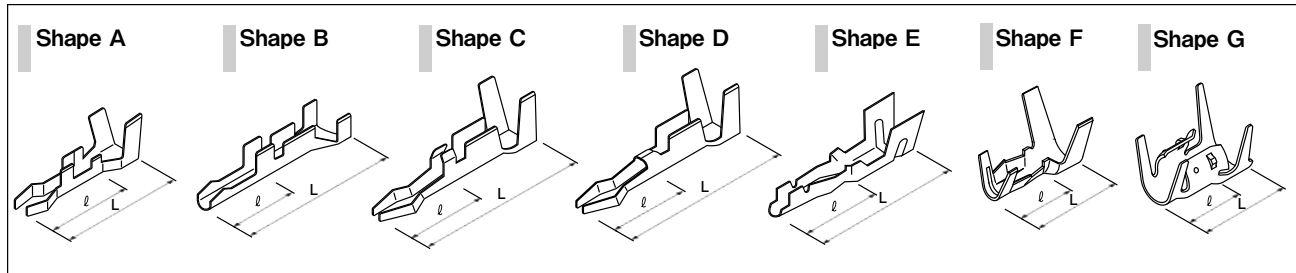

Model No.	Shape	Applicable wire		Insulation O.D. (mm)	L (mm)	ℓ (mm)	Applicable PCB		Q'ty/reel	Material and Finish
		mm ²	AWG #				Thickness (mm)	Hole diameter (mm)		
SIN-002T-1.0	A	0.08 to 0.13	28 to 26	0.8 to 1.3	5.8	3.1	1.6	1.0 ±0.05	9,000	Brass, tin-plated (reflow treatment)
SIN-002T-1.2N		0.08 to 0.13	28 to 26	0.9 to 1.4	6.0	3.3		1.2 ±0.05	9,000	
SIN-01T-1.8	C	0.13 to 0.5	26 to 20	1.2 to 2.5	10.0	3.55		1.8 ^{+0.1} ₀	7,000	
SIN-001T-1.2B	D	0.05 to 0.22	30 to 24	0.9 to 1.5	10.0	3.5		1.2 ±0.05	11,000	
SIN-21T-1.8		0.30 to 0.83	22 to 18	1.7 to 3.8	12.6	3.6		1.8 ^{+0.1} ₀	3,000	
SIN-002T-1.0S	E	0.08 to 0.13	28 to 26	0.8 to 1.3	7.0	3.5		1.0 ±0.05	13,000	
*SIN-21T-1.8S	F	0.30 to 0.83	22 to 18	1.5 to 3.0	7.6	4.1		1.8 ^{+0.1} ₀	4,500	
*SIN-41T-2.4S		0.83 to 1.31	18,16	2.8 to 3.4	8.3	4.3		2.4 ±0.05	3,000	
*SIN-61T-2.6S		2.0	14	3.4 to 3.8	8.3	4.3		2.5 ^{+0.1} ₀	3,000	
*SIN-81T-3.6S		3.3	12	4.0 to 4.2	9.2	4.5		3.55 ±0.05	2,000	
*SIN-91T-4.7S	G	3.3 to 5.5	12,10	4.0 to 4.9	9.4	4.7	1.6	4.7 ±0.05	2,000	
SIN-001T-1.2	B	0.05 to 0.15	30 to 26	0.8 to 1.4	9.1	3.05	1.2	(1.20)	7,500	Brass, copper-undercoated, tin-plated
SIN-01T-1.2		0.2 to 0.5	24 to 20	1.5 to 2.3	9.1	3.05		5,000		
SIN-01T-1.8N		C	0.13 to 0.5	26 to 20	1.2 to 2.5	10.0		3.55	1.6	

RoHS2 compliance

Note: 1. The SIN connectors marked with * are used for solder dipping the large wires (AWG #16, AWG #14, AWG #12).

When using this product, please confirm the contents in the product specifications.

2. The SIN-01T-1.8N type requires less force for insertion into a PC board. Please select depending on your usage conditions.

3. Hole dimensions may differ according to the type of PC board and piercing method.

Contact	Crimping machine	Applicator		
		Crimp applicator	Dies	Crimp applicator with dies
SIN-002T-1.0	AP-K2N	MKS-L	MK/SIN-002-10	APLMK SIN002-10
SIN-001T-1.2			MK/SIN-001-12	APLMK SIN001-12
SIN-01T-1.2			MK/SIN-01-12	APLMK SIN01-12
SIN-01T-1.8(N)			MK/SIN-01-18	APLMK SIN01-18
SIN-001T-1.2B			MK/SIN-001-12B	APLMK SIN001-12B
SIN-002T-1.2N			MK/SIN-002-12N	APLMK SIN002-12N

Note: Contact JST for fully automatic crimping applicator.

Contact	Crimping machine	Applicator		
		Crimp applicator	Dies	Crimp applicator with dies
SIN-21T-1.8	AP-K2N	MKS-L	MK/SIN-21-18	APLMK SIN21-18
SIN-002T-1.0S			MKS-L-IN	APLMK SIN002-10S
SIN-21T-1.8S		MKS-L-SIN	MK/SIN-21-18S	APLMK SIN21-18S
SIN-41T-2.4S			MK/SIN-41-24S	APLMK SIN41-24S
SIN-61T-2.6S			MK/SIN-61-26S	APLMK SIN61-26S
SIN-81T-3.6S			MK/SIN-81-36S	APLMK SIN81-36S
SIN-91T-4.7S		MKS-L-SIN3	MK/SIN-91-47S	APLMK SIN91-47S

Note: Contact JST for fully automatic crimping applicator.

Model number allocation

Contact

SIN - 61 T - 2.6 S

Series name _____

Applicable wire range:
 002...AWG #28 to #26 001...AWG #30 to #24
 (001 and 002 type contacts with insulation barrel)
 01...AWG #26 to #20 21...AWG #22 to #18
 41...AWG #18, #16 61...AWG #14
 81...AWG #12
 91...AWG #12, #10

Surface finish: T...Tin-plated (with/without reflow treatment) _____

Applicable PCB hole size _____

Supplementary symbol _____